


CERAMIC HEATING



www.sbm-international.net

Exclusive manufacturer of gas radiant heaters



“CBM – България”

1124 гр. София
бул. “Цариградско шосе” №33

тел. : 02 / 944 51 13 • факс : 02 / 944 94 91

Ямбол тел./факс : 046 / 66 29 29

Управител : Димитър Димитров

Мобилен : 088 / 833 62 35


E-mail :

► sbm-bg@datacom.bg ► ddimitrov@cbm.bg ► office@cbm.bg

<http://>

► web.need.bg/sbm-bg ► www.cbm.bg

Distributed by :

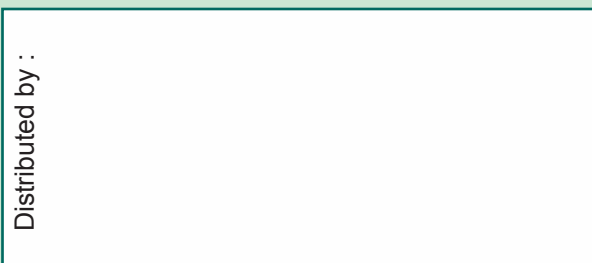

COPYRIGHT © 11/2011 - SBM PUBLI-PRODUCTION 030441102
ALL RIGHTS RESERVED - PRINTED IN FRANCE

CERAMIC HEATING

New generation of brooders



Choice of comfort temperature
for each bird




CERAMIC HEATING

ECO' CERAMIC SYSTEM : The most recent technical developments have led to a new generation of fully automatic ceramic brooders. The use of these innovative appliances for heating poultry houses allows the grower to combine technical performance and energy savings.

■ SBM ceramic brooders emit towards the floor infrared rays which turn into heat when they encounter the birds or the litter. The direct heat they receive gives them the best comfort for their optimum growth.

■ The litter remains comfortably cushioned, excess moisture is removed, its hygiene condition is improved. This birds' comfort translates directly into increased profit for the grower : reduced mortality, improved feed conversion, more homogeneous flocks.

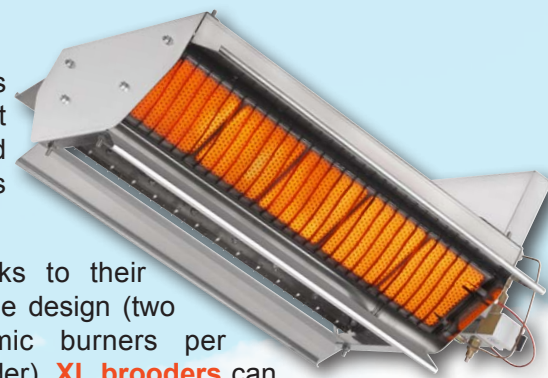



Thanks to their unique design (two ceramic burners per brooder), **XL brooders** can be installed in one central line, for poultry houses up to 16m wide. The birds can find their comfort zone throughout the entire floor space.

XL brooders are strong, light and compact. They are easy to install, operate and maintain.

Made out of quality materials (stainless steel, ceramic, brass) and not requiring any moving mechanical part, their extended lifetime is unmatched.

INSTALLATION with **AUTOMATIC** ignition and control

SBM **FA** and **XLA** brooders are controlled by a **SUNMASTER** module, and do not require any intervention by the grower for their operation. They are also compatible with major brands of poultry computers.

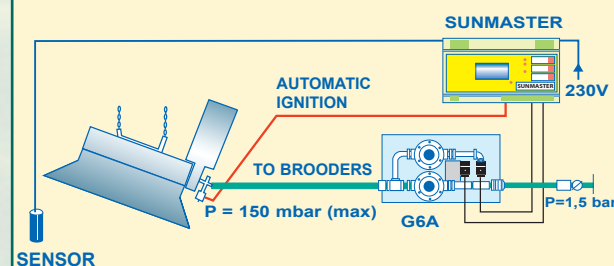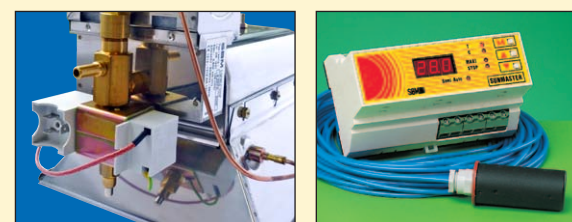

DOUBLE brooders type "XL"					
Gas brooder	Capacity		Cons. g/h	Hanging height cm	Floor coverage * length x width
	W	kcal/h			
212 XLS/XLA	11 000	9 600	780	100 to 180	14m x 16m
216 XLS/XLA	14 200	12 200	1 020	120 to 200	14m x 16m

* Maximum value per brooder to be confirmed by your SBM specialist



- » GAS SAVINGS
- » OPTIMUM FLOCK PERFORMANCE
- » MAXIMUM HEAT FOR THE BIRDS
- » LITTER KEPT COMFORTABLE

SINGLE brooders					
Gas brooder	Capacity		Cons. g/h	Hanging height cm	Number of chickens *
	W	kcal/h			
3 FS / FA	1 375	1 200	100	80 to 100	1 000
6 FS / FA	3 000	2 600	210	80 to 100	1 000
8 FS / FA	3 550	3 050	255	80 to 120	1 000
12 FS / FA	5 500	4 800	390	120 to 170	1 500
16 FS / FA	7 100	6 100	510	140 to 190	2 000


* Maximum value per brooder to be confirmed by your SBM specialist



DOUBLE brooders type "XL"



DOUBLE brooders type "XL"

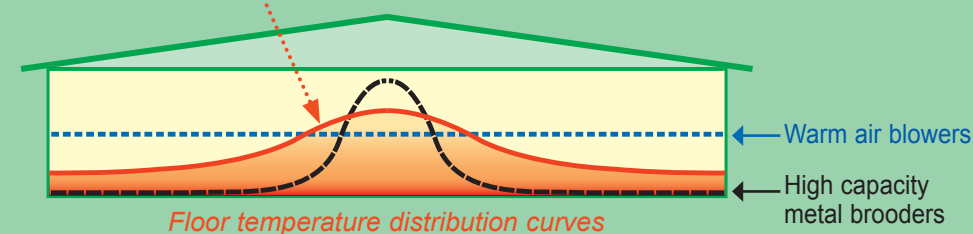

OPTIMUM BIRD COMFORT =

- Choice of comfort temperature for each bird
- +
- No cold spot/area
- +
- No hot spot/area



SINGLE brooders